

Chinese Wok Stove & Combination

Warranty

2 years parts
1 year labour

Supertron Chinese Wok Stoves and Combination Wok Stoves are designed specially for Asian style cooking. All stoves are highly efficient with high performance. The series also offer versatility in cooking styles which make these a must for any Asian restaurant. They come with a fully integrated cooling system and can be customised upon request



Standard Features:

Sturdy steel tube frame encased in high grade stainless steel double skin exterior and insulated interior. Chimney duct is constructed from cast iron. Wok ring is fully enamelled cast iron to enable easy cleaning.

Burner Options:


1) Boiling burner 2) Dual ring burner 3) Duckbill burner 4) Chimney burner - High efficiency, low gas consumption
*All wok come standard with chimney burner for its 14 inch rings, duckbill burner for its 17 inch rings and boiling burner for its 7 inch rings.

Operation:

This wok stove has its own water cooling and filling system and includes a unique removable waste straining basket.

Safety:

All units are equipped with a flame failure automatic cut off module

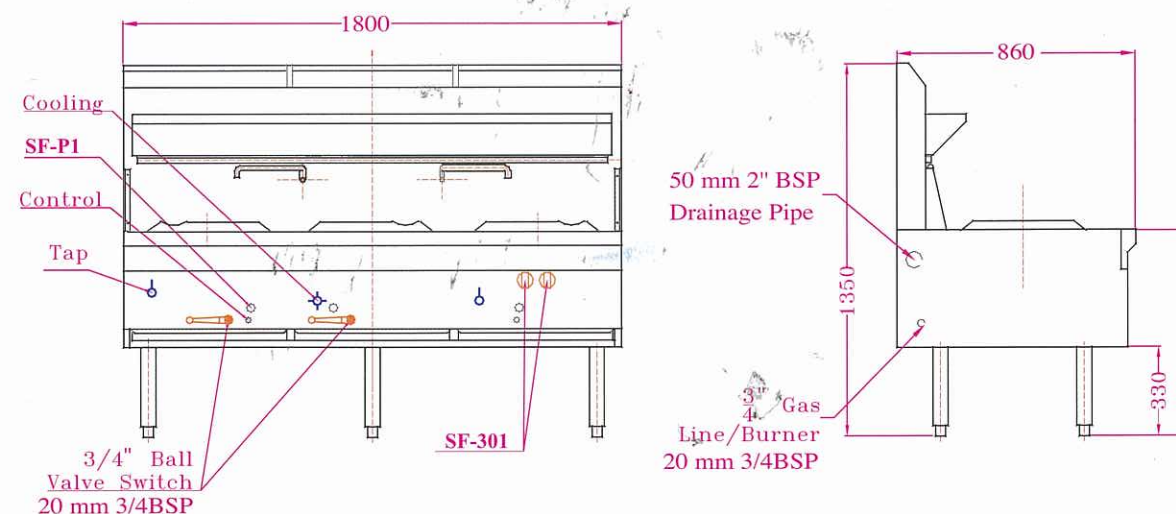

Specifications

Chinese Wok Stove	1W14R	2W14R	3W14R	4W14R	1W17R (OF/FR)
Gas Capacity (MJ)					
Duckbill burner	120	240	360	480	120
Chimney burner	120	240	360	480	120
Dual ring burner	60	120	180	240	60
Dimensions (mm) (W x D x H)	600x860x800	1200x860x800	1800 x860x800	2400x860x800	650x860x800
Weight (KG)	130	240	380	550	140
Combination Wok Stove					
Gas Capacity (MJ)					
Duckbill burner	170	290	410	530	480
Chimney burner	170	290	410	530	480
Dual ring burner	100	160	180	220	240
Dimensions (mm) (W x D x H)	900x860x800	1580x860x800	1800x860x800	2100x860x800	2400x860x800
Weight (KG)	150	260	370	400	520
Height including splash back	1350	1350	1350	1350	1350
Gas Connection	20 mm 3/4 inch BSP male for each burner outlet				
Gas Type	Available in both natural gas and LPG, please specify when ordering				
Controls	20 mm 3/4 inch ball valve, SIT D3 controls with flame failure, thermocouple and automatic cut off, SF-P1 pilot switch				
Water supply	13 mm 1 / 2 inch compression or pipe				
Drainage	2 inch BSP male galvanized pipe				
Installation to AS 5601	Licensed plumber/gasfitter/Authorised person				
Options	Side splash guard Wok joining plate				
Spare parts	All spare parts are available from our distributors or your local plumbing supply				