

15 liter electric fryers

The Electrolux 900-Line of modular cooking equipment is designed to meet the heavy duty cooking requirements of institutional caterers and the larger restaurants and hotel kitchens. The flexibility of the modular design, with innumerable configurations either free-standing, bridged or cantilever, can be precisely tailored to meet the needs of the caterer. The models detailed on this sheet are 15 liter electric fryers.



210339

EASY TO INSTALL

- All models can be installed on cantilever system.
- Main connections can be via the base of the unit.
- All models provided with service duct to facilitate installation.
- Feet in stainless steel 50 mm adjustables in height.

EASY TO CLEAN

- Worktop in 2 mm, stainless steel.
- Front, side, rear and bottom panels in stainless steel with Scotch Brite finish.
- All models have right-angled side edges to allow flush-fitting joints between units, eliminating gaps and possible dirt traps.

- The special design of the control knob system guarantees against water infiltration.
- The "V" shaped wells have the heating elements attached to the outside allowing an increased life of the oil, greater productivity and an easier cleaning.

EASY TO USE

- Units are 93 cm deep to give an unusually large working surface area.
- Infrared high efficiency external heating elements.
- Working temperature from 105°C to 185°C.

- Additional overheat safety thermostat.

EASY TO MAINTAIN

- Oil drainage via a tap into a drainage container positioned under the well thus simplifying the consumed oil management and guaranteeing the operator safety.
- IPX5 water protection.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.



Electrolux

	Elco 900 15 liter electric fryers	ZFR15E1SV 210338	ZFR15E2DV 210339
TECHNICAL DATA			
Power supply		Electric	Electric
Installation		FS on concrete base; FS on feet	FS on concrete base; FS on feet
Configuration		Free Standing	Free Standing
Capacity - lt.		15	15
External dimensions - mm			
width		400	800
depth		930	930
height		850	850
External dimensions - mm			
height adjustment		50	50
N° of wells		1	2
Usable well dimensions - mm			
width		240	240
depth		380	380
height		505	505
Number of baskets		1	1
Well capacity - gal			
max		3.96	3.96
Thermostatic		●	●
Temperature limiter		●	●
Thermostat range (min-max) - °C		105, 185	105, 185
Well capacity - min/max - lt.		13, 15	13, 15
Total power - hp		13 1/2	26 3/4
Power - kW			
installed-electric		10	20
Net weight - kg.		50	86
Supply voltage		400 V, 3N, 50/60	400 V, 3N, 50/60
INCLUDED ACCESSORIES			
BASKET FOR 14/15 LT FRYERS		1	2
LEFT SIDE DOOR FOR OPEN BASE CUPBOARD			1
RIGHT SIDE DOOR FOR OPEN BASE CUPBOARD		1	1
ACCESSORIES			
2 1/2 BASKETS FOR 14/15 LT FRYERS		921692	921692
2 PANELS FOR SERVICE DUCT (BACK TO BACK)		206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)		206181	206181
2 SIDE COVERING PANELS H=700 D=900		216134	216134
2 SIDE KICKING STRIPS		206180	206180
2 SIDE KICKING STRIPS F.CONCRETE INSTAL.		206157	206157
4 FEET FOR CONCRETE INSTALLATION		206210	206210
4 WHEELS (2 WITH BRAKE)			206188
BASKET FOR 14/15 LT FRYERS		921691	921691
DEFLECTOR FOR FLOURED PRODUCTS-15L FRYER		921696	921696
DRAUGHT DIVERTER WITH 120 MM DIAMETER		206126	
DRAUGHT DIVERTER WITH 150 MM DIAMETER			206132
FLANGED FEET KIT		206136	206136
FLUE CONDENSER FOR 1/2 MOD. DIAM.120MM		206155	
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM		206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM		206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM		206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.400 MM		206147	
FRONT.KICK.STRIP F.CONCRETE INST.800 MM		206148	206148
FRONTAL HANDRAIL 1200 MM		216049	216049
FRONTAL HANDRAIL 1600 MM		216050	216050
FRONTAL HANDRAIL 400 MM		216046	216046
FRONTAL HANDRAIL 800 MM		216047	216047
FRONTAL KICKING STRIP 1000 MM		206177	206177
FRONTAL KICKING STRIP 1200 MM		206178	206178
FRONTAL KICKING STRIP 1600 MM		206179	206179
FRONTAL KICKING STRIP 400 MM		206175	
FRONTAL KICKING STRIP 800 MM		206176	206176
JUNCTION SEALING KIT		206086	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM		216185	216185
LARGE HANDRAIL(PORTIONING SHELF)800 MM		216186	216186
LEFT SIDE DOOR FOR OPEN BASE CUPBOARD		216195	216195
MATCHING RING FOR FLUE CONDENSER 150DIAM			206133
OIL FILTER FOR FRYERS		206143	206143
PAIR OF COVERING STRIPS FOR END ELEMENTS		216234	216234
REAR FLUE UPSTAND FOR LARGE CHIMNEY			206160
REAR FLUE UPSTAND FOR SMALL CHIMNEY		206159	
RIGHT SIDE DOOR FOR OPEN BASE CUPBOARD		216194	216194
SEDIMENT TRAY FOR 15L FRYER		206235	206235
SIDE HANDRAIL-RIGHT/LEFT HAND		216044	216044
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM		206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM		206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM		206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM		206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM		206154	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM		206137	206137
UNCLOGGING ROD F.15LT FRYER DRAIN.PIPE		921695	921695


CANE010

2008-12-18

Subject to change without notice

Elco 900
15 liter electric fryers

210338, 210339

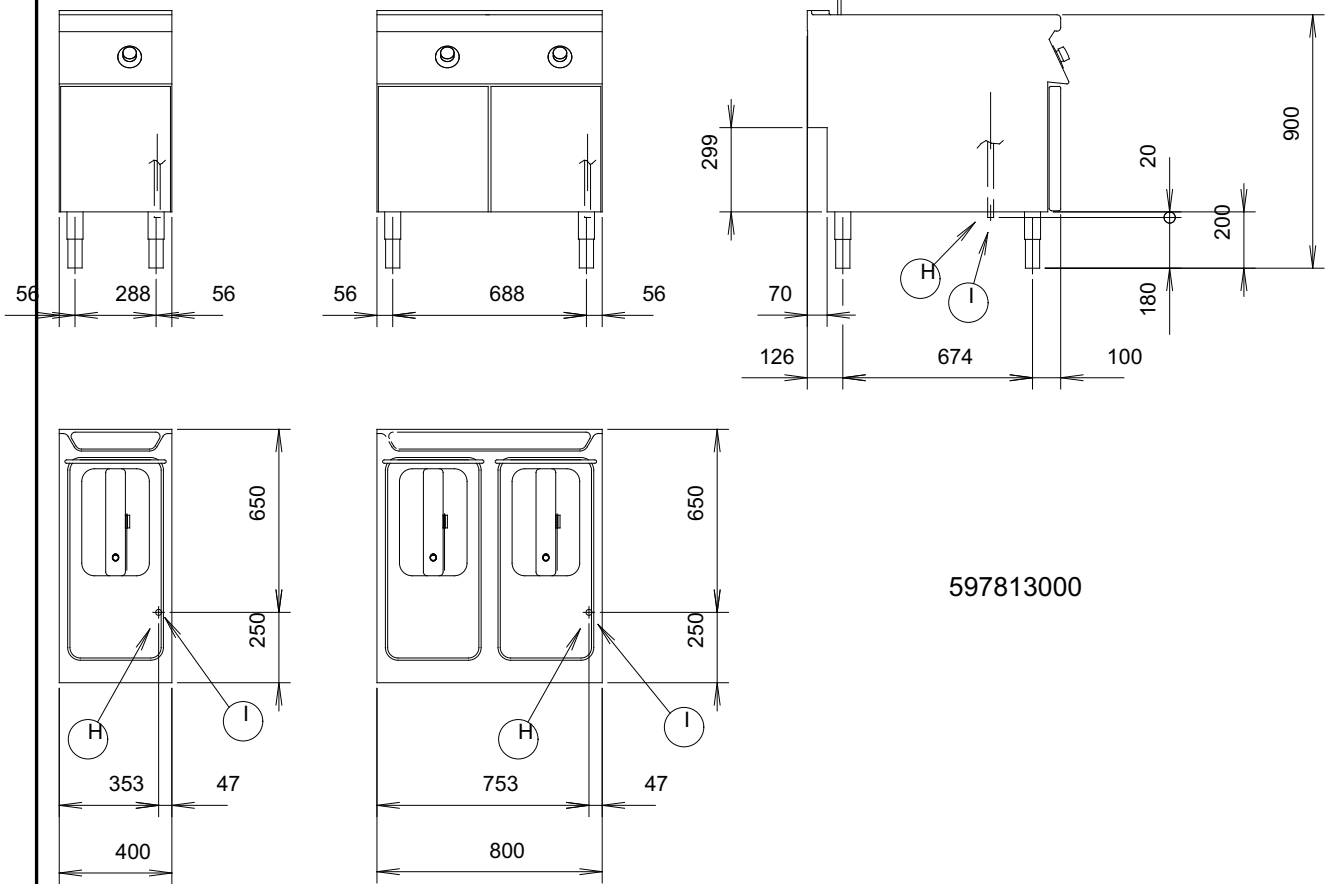

597813000

LEGEND

I - Electrical connection

ZFR15E1SV
210338

400 V, 3N, 50/60

ZFR15E2DV
210339

400 V, 3N, 50/60

CANE010

2008-12-18

Subject to change without notice