

23 liter electric fryers

The Electrolux 900-Line of modular cooking equipment is designed to meet the heavy duty cooking requirements of institutional caterers and the larger restaurants and hotel kitchens. The flexibility of the modular design, with innumerable configurations either free-standing, bridged or cantilever, can be precisely tailored to meet the needs of the caterer. The models detailed on this sheet are 23 liter electric fryers.



210342

EASY TO INSTALL

- All models can be installed on cantilever system.
- Main connections can be via the base of the unit.
- All models provided with service duct to facilitate installation.
- Feet in stainless steel 50 mm adjustables in height.

EASY TO CLEAN

- Worktop in 2 mm, stainless steel.
- Front, side, rear and bottom panels in stainless steel with Scotch Brite finish.
- All models have right-angled side edges to allow flush-fitting joints between units, eliminating gaps and possible dirt traps.

- The special design of the control knob system guarantees against water infiltration.
- Door with handles in stainless steel.
- The "V" shaped pressed wells have the heating elements attached to the outside allowing an increased life of the oil, greater productivity and an easier cleaning.

EASY TO USE

- Units are 93 cm deep to give an unusually large working surface area.
- Infrared high efficiency external heating elements.
- Working temperature from 105°C to 185°C.

- Additional overheat safety thermostat.
- The units are supplied, as standard, with 2 half baskets for each well.

EASY TO MAINTAIN

- Oil drainage via a tap into a drainage container positioned under the well thus simplifying the consumed oil management and guaranteeing the operator safety.
- IPX5 water protection.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.



Electrolux

Elco 900
23 liter electric fryers

TECHNICAL DATA	ZFRSE1SVEX 210342	ZFRSE2DVEX 210343
Power supply	Electric	Electric
Installation	FS on concrete base; FS on feet	FS on concrete base; FS on feet
Configuration	Free Standing	Free Standing
Capacity - lt.	23	23
External dimensions - mm		
width	400	800
depth	930	930
height	850	850
External dimensions - mm		
height adjustment	50	50
Height adjustment-inch (-/+)	2 "	2 "
N° of wells	1	2
Usable well dimensions - mm		
width	340	340
depth	400	400
height	575	575
Number of baskets	2	2
Well capacity - gal		
min	5.55	5.55
max	6.08	6.08
Thermostatic	●	●
Temperature limiter	●	●
Thermostat range (min-max) - °C	105, 185	105, 185
Well capacity - min/max - lt.	21, 23	21, 23
Power - kW		
installed-electric	18	36
Net weight - kg.	57	115
Supply voltage	400 V, 3N, 50/60	400 V, 3N, 50/60
INCLUDED ACCESSORIES		
2 HALF SIZE BASKETS FOR HD FRYERS	1	2
LEFT SIDE DOOR FOR OPEN BASE CUPBOARD		1
RIGHT SIDE DOOR FOR OPEN BASE CUPBOARD	1	1
ACCESSORIES		
1 FULL SIZE BASKET FOR HD 900 FRYERS	927226	927226
2 HALF SIZE BASKETS FOR HD FRYERS	927223	927223
2 SIDE COVERING PANELS H=700 D=900	216134	216134
2 SIDE KICKING STRIPS	206180	206180
4 WHEELS (2 WITH BRAKE)		206188
DEFLECTOR FOR FLOURED PRODUCTS-23L FRYER	960645	960645
DRAUGHT DIVERTER WITH 150 MM DIAMETER		206132
EXTENSION FOR OIL DRAINAGE	206209	206209
FLANGED FEET KIT	206136	206136
FRONTAL HANDRAIL 1200 MM	216049	216049
FRONTAL HANDRAIL 1600 MM	216050	216050
FRONTAL HANDRAIL 400 MM	216046	216046
FRONTAL HANDRAIL 800 MM	216047	216047
FRONTAL KICKING STRIP FOR 23 LT FRYER	206203	206203
HYGIENIC LID FOR 23 LT FRYERS	206201	206201
JUNCTION SEALING KIT	206086	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	216185	216185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	216186	216186
LEFT SIDE DOOR FOR OPEN BASE CUPBOARD	216195	216195
MATCHING RING FOR FLUE CONDENSER 150DIAM		206133
OIL FILTER FOR FRYERS	206143	206143
PAIR OF COVERING STRIPS FOR END ELEMENTS	216234	216234
REAR FLUE UPSTAND FOR LARGE CHIMNEY		206160
REAR FLUE UPSTAND FOR SMALL CHIMNEY	206159	
RIGHT SIDE DOOR FOR OPEN BASE CUPBOARD	216194	216194
SEDIMENT TRAY FOR 23 LT FRYER	206173	206173
SIDE HANDRAIL-RIGHT/LEFT HAND	216044	216044
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137
UNCLOGGING ROD F.23LT FRYER DRAIN.PIPE	927227	927227


CANG010

2008-12-18

Subject to change without notice

Elco 900
23 liter electric fryers

210342, 210343

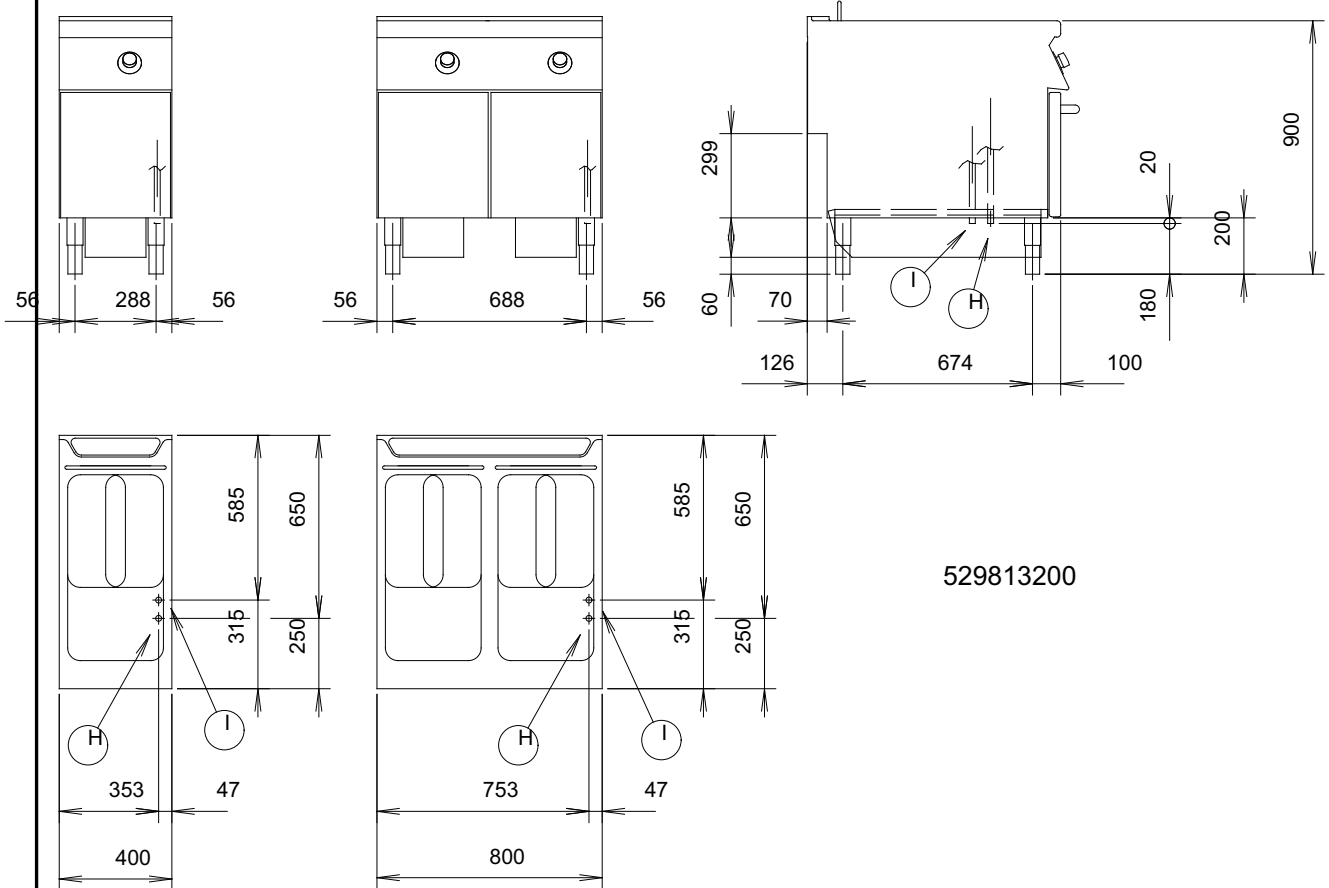

CANG010

2008-12-18

LEGEND I - Electrical connection	ZFRSE1SVEX 210342	ZFRSE2DVEX 210343
	400 V, 3N, 50/60	400 V, 3N, 50/60

Subject to change without notice